


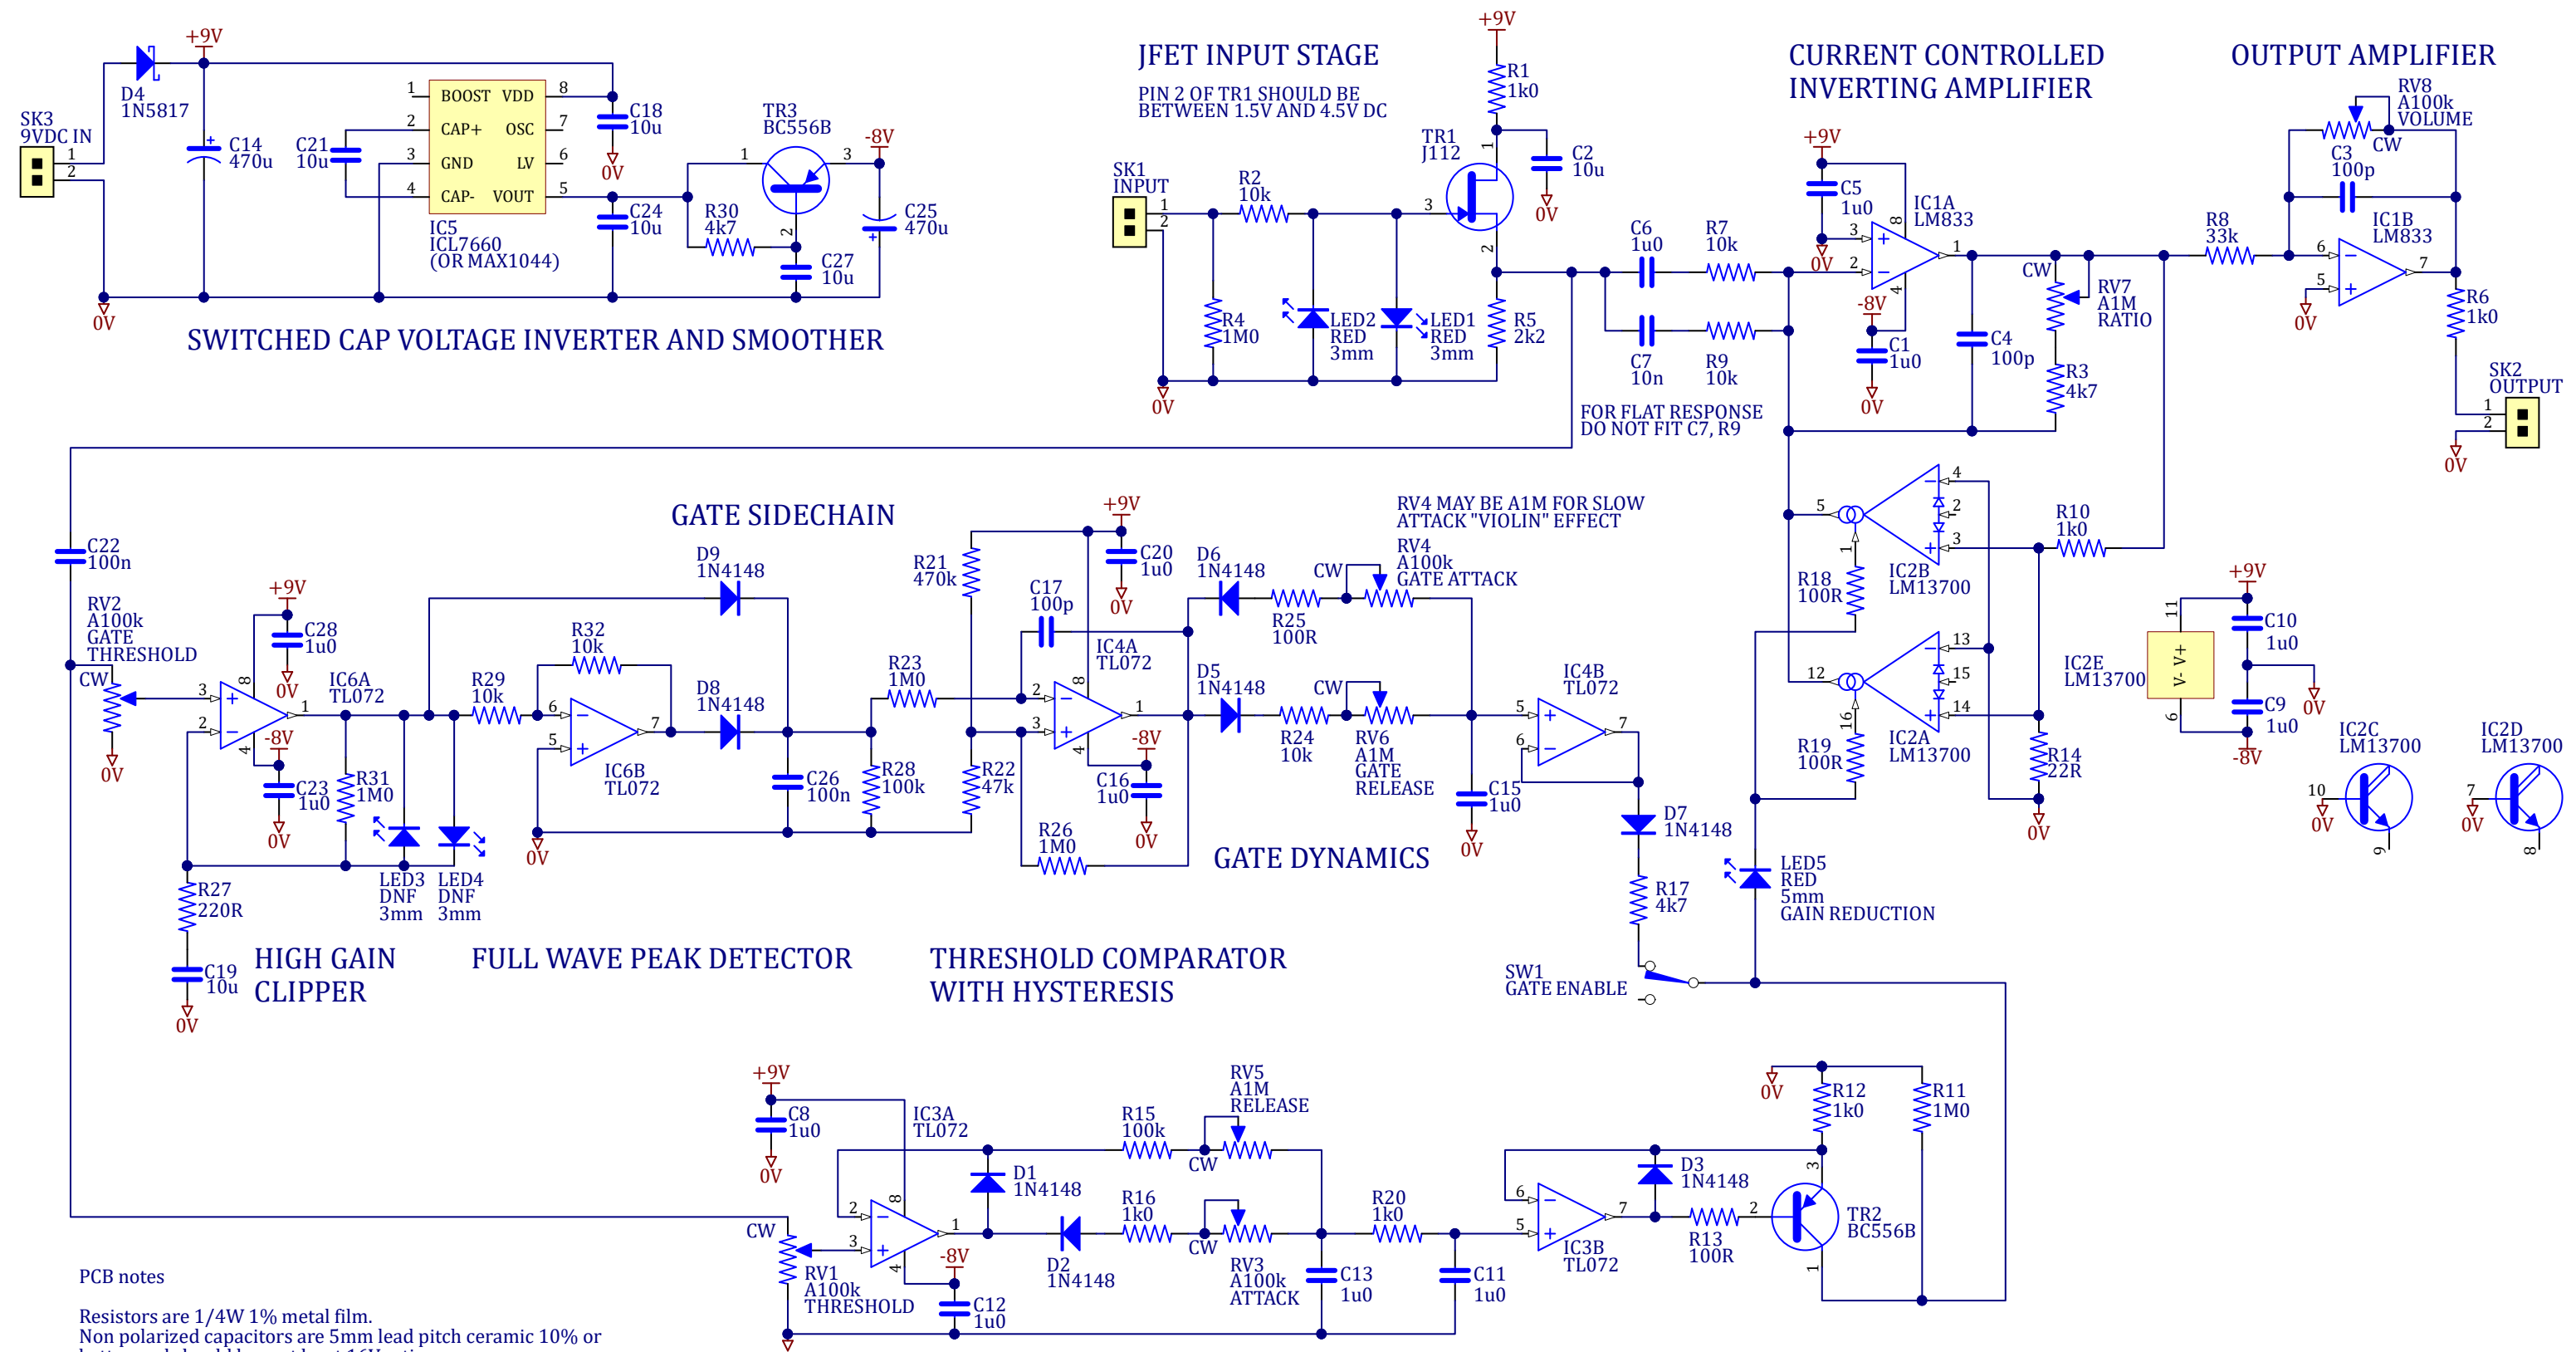

PCB notes

Resistors are 1/4W 1% metal film.
Non polarized capacitors are 5mm lead pitch ceramic 10% or better, and should have at least 16V rating.
5mm lead pitch polyester film caps will work well too.
The 10uF caps should be X5R or X7R, not Z5U.
PCB mount pots are Alpha 16mm vertical mount from Tayda A-2425 and A-2400 respectively.
PCB mount toggle switch SW1 is Tayda A-4567.
Input, output and power connectors are standard 0.1" headers.

Engineer's Thumb original design (C) ValveWizard 2016
Modifications and addition of noise gate Jonny Reckless 2018

The Engineer's Thumb redux		
Size: 11x17	No: CT030	Revision: C.4
Date: 7/8/2018	Sheet: 1 of 1	
File: Sheet1.SchDoc		

